


Creel Specification



TX – Overhead Rail Lifter System

The TX overhead rail package lifter system takes the strain away from the operators during creel loading or winder doffing. This lifter unit is designed for easy mounting on twin rails. The unit is supplied with a well balanced package manipulator to articulate packages from vertical to horizontal.

Power Supply	24V 20A DC, 230V 3A AC, 110V 6A AC
Max package weight	20kgs
Standard tube sizes	3" / 3 1/4" / 90mm / 94mm
Features	<p>Twist grip throttle allows operator to control speed of operation.</p> <p>Easily interchangeable core grippers.</p> <p>Ergonomic design does not require operator to move hand positions.</p> <p>Secure interlock system to prevent accidental dropping of package.</p> <p>Infra-red communication between manipulator unit and overhead Drive.</p> <p>Automatic overhead sensing and cutout.</p>

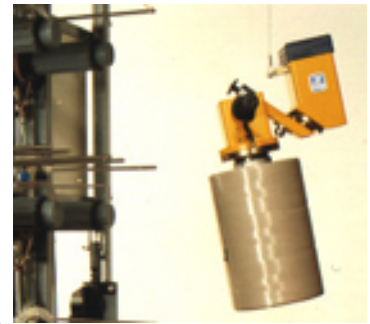

Specification can be varied to suit any requirement



Texkimp Limited Manchester Road, Northwich Cheshire CW9 7NN England
Tel: + 44 (0)1606 40345 Fax: + 44 (0)1606 40366
website: www.texkimp.co.uk email: sales@texkimp.co.uk

Agent